

Expertise. Experience. Innovation.



WEIRO® Site Welfare Trailer *SINUS* Type A1 - A4



Site Welfare Trailer
SINUS type A1 - A4



WEIRO® Site Welfare Trailer *SINUS* type A1 to A4, single axle, with ring hitch, towing speed 25 km/h, body length from 3,0 m to 5,0 m.

Expertise. Experience. Innovation.



Site Welfare Trailer WEIRO® SINUS type A1 - A4

Specification

Chassis

- painted chassis
- chassis made from u profile steel
- ring hitch
- axle without suspension, without brakes, track width 150 cm
- lighting equipment 12 V
- tyres 175 R 14
- 4 adjustable prop stands

Door/Window

- steel door 750 x 1875 mm, profile cylinder lock, optional breaking and entering security
- door check strap
- solid galvanized stair, 2-step
- sliding window 750 x 850 mm with safety glass, optional breaking and entering security

Floor


- painted, water resistant particle board
- polystyrene thermal insulation
- painted particle board with optional skid resistant PVC floor covering bonded over the entire surface

Body

- nailed wooden framework
- plastic coated, profiled, galvanized steel sheet on outer walls. Standard RAL 7032, other RAL colours by request
- inside lining plastic coated wood material board, optional 10 mm particle board
- rock wool wall insulation
- edges made from galvanized steel, red/white coated

Roof

- moulded galvanized corrugated metal sheet
- 2 galvanized steel gutters
- rock wool insulation
- inside lining plastic coated wood material board

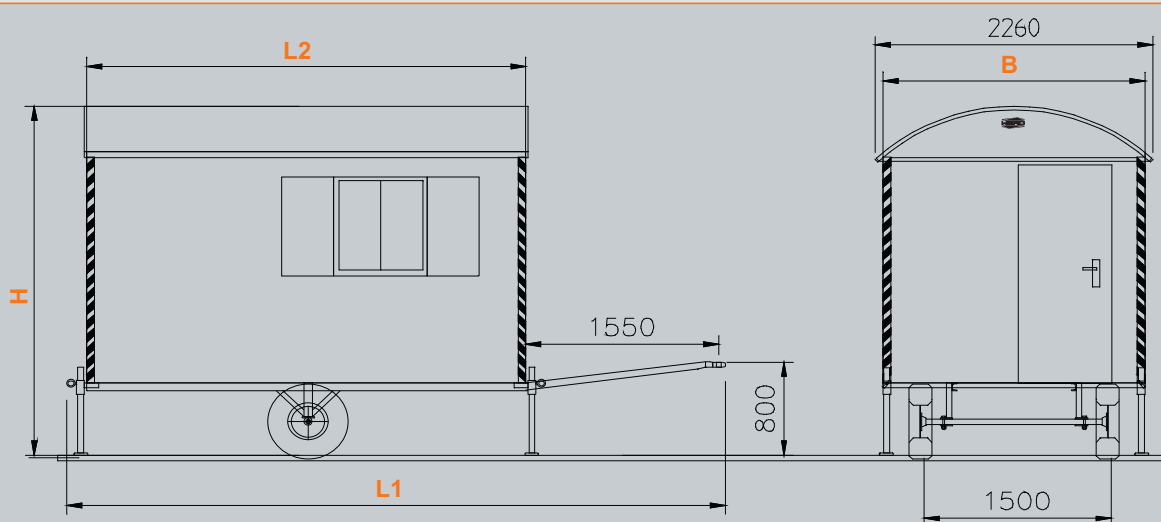

Dimensions	Total Length L1	Body Length L2	Body Width B	Inside Height	Outer Height H
Sinus A 1	apprx. 482 cm	apprx. 306 cm	apprx. 210 cm	apprx. 230 cm	apprx. 300 cm
Sinus A 2	apprx. 528 cm	apprx. 350 cm	apprx. 210 cm	apprx. 230 cm	apprx. 300 cm
Sinus A 3	apprx. 580 cm	apprx. 404 cm	apprx. 210 cm	apprx. 230 cm	apprx. 300 cm
Sinus A 4	apprx. 680 cm	apprx. 504 cm	apprx. 210 cm	apprx. 230 cm	apprx. 300 cm