Expertise. Experience. Innovation.



# WEIRO® Site Welfare Trailer —————











Sandwich construction, galvanized chassis, with ball hitch, as non braked, single axle trailer of 3.50 m body length with a total admissible weight of 750 kg: or with overrun brake and a maximum gross weight of up to 1,500 kg with body lengths of 3.00 to 6.00 m

# Expertise. Experience. Innovation.



## WEIRO® Site Welfare Trailer ———

### **Specification**

#### Chassis

- galvanized chassisball hitch
- axle with full track rubber suspension, track width 165 cm
- tyres 195/50 10 TL
- 4 adjustable galvanized prop stands
- lighting equipment 12 V

#### Floor

- one piece sandwich element
- thermal insulation by polyurethane foam
- subfloor made from galvanized steel
- plywood, painted, optional with **PVC-floor**

#### **Body**

- one piece sandwich elements
- outside lining by glas fiber reinforced plastic, 1,5 mm, UV resistent, white, other RAL colours by request
- inside lining by glas fiber reinforced plastic,
- thermal insulation by polyurethane foam
- edges made from aluminium

### **Door/Window**

- steel door 875 x 2000 mm, profile cylinder lock, optional door glazing
- door check strap
- solid galvanized stair, 1-step
- sliding window 750 x 850 mm with safety glass; optional breaking and entering security














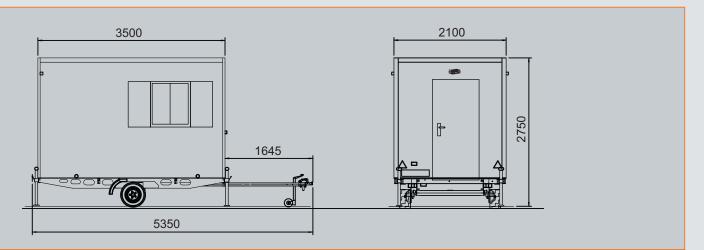

dimensions	Iotal length	Body length	Body width	Internal	Outer height
recreation trailer <b>□□</b> ■□	ca. 5350 mm	ca. 3500 mm	ca. 2100 mm	ca. 2150 mm	ca. 2750 mm