

Site Welfare Trailer WEIRO® type BME-B 20 S











Site Welfare Trailer, single axle, with **ball hitch, body length of 3.20 m**, with **galvanizsed chassis,** unbraked, 80 km/h speed, permissible total weight 750 kg



WEIRO® REPERNT type BME-B 20 S

Chassis:

- chassis made from galvanized lightweight profiles
- ball hitch
- tyres 195/55 R 10
- axle with full track rubber suspension, track width 165 cm
- 4 adjustable galvanized prop stands
- lighting equipment 12 V

Floor:

- one piece sandwich element
- subfloor made from galvanized steel
- galvanized floor frame
- thermal insulation by polyurethane foam
- painted plywood with optional skid resistant PVC floor

Body:

- nailed wooden framework
- plastic coated, profiled, galvanized steel sheet on outer walls. Standard RAL 7032, other RAL colours by request
- inside lining plastic coated wood material board, optional 10 mm particle board

- rock wool insulation
- edges made from galvanized steel, red/white coated

Door/Window:

- steel door 750 x 1,875 mm, profile cylinder lock, optional breaking and entering security
- solid galvanized stair, 1-step
- sliding window 750 x 850 mm with safety glass; optional breaking and entering security

Roof:

- strong, arched design
- galvanized steel, folded lengthways for strength, 2 galvanized steel gutters
- rock wool insulation
- inside lining plastic coated wood material board

empty weight (without furniture) 650 kg gross vehicle weight 750 kg

Dimensions (mm)

Total Length 4,730 mm Body Length 3,220 mm
Total Width 2,340 mm Body Width 2,220 mm
Outer Height 3,020 mm Inside Height 2,300 mm




pr chassis made from **galvanized lightweight profiles**, **galvanized prop stands**



solid galvanized stair, 1-step



Floor made from one piece sandwich element with subfloor made from **galvanized steel**, **galvanized floor frame**

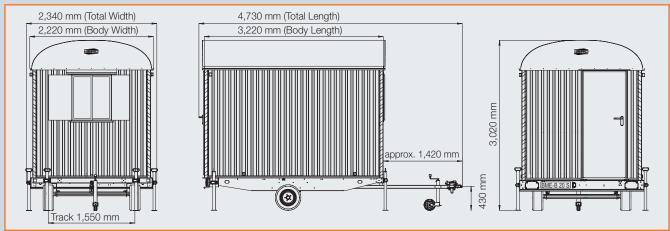

Weisig Maschinenbau GmbH Am Frohberg 3 31061 Alfeld Germany

Tel. +49 (0)5181-8448-0 Fax +49 (0)5181-8448-44